

F129 Convector Panel Heater

HIGH-END ACTIVE HEAT CONVECTOR WITH INTEGRATED WEEKLY PROGRAMMING



+ PRODUCT

COMFORT

- Easy prog: Program your device 24h/7, according to your life rhythm for greater comfort & savings
- Fast heating thanks to an efficient heat distribution on the appliance surface
- Sheathed heating element with an aluminium diffuser
- Class II and IP 24 protection with dual electric insulation for ultimate safety
- Automatic overheating safety device and anti-tilt system

SAVINGS

- Up to 25% energy savings*
- High-precision electronic thermostat
- ErP-compliant

USER-FRIENDLINESS


- Ergonomic LCD digital controls
- 2 modes: Manual/Prog
- Easy to install: H-shaped vertical support
- Mobile with standing kit and plug

DESIGN

- High-end modern design
- Stamped front air outlet
- Colour: White (RAL 9016)

ACTIVE HEAT CONVECTOR


1000 TO 2400 W



Model available**



Energy savings



LCD digital controls



Technology



Heating element type


*Compared with a mechanical convector

**This model is A: Horizontal mounting position only (or mobile with optional standing kit)

F129 Design



- 1 LCD digital controls
- 2 Air outlet
- 3 Sheathed heating element with aluminium diffuser
- 4 Room temperature sensor
- 5 Front panel
- 6 Anti-tilt system
- 7 Overheating safety device




- 1 Room & set temperature and active mode display (2 modes: Manual/Prog)
- 2 Navigation buttons
- 3 Access to menu/validation



EASY PROG

- **Manual mode:** Allows to set up the device at the desired temperature from Off to 30°C.
- **Prog mode:** Allows to set up to 3 periods of Comfort temperature by day (24h) over 7 days. Possibility to copy a daily programme on other days of the week.

INSTALLATION DIMENSIONS

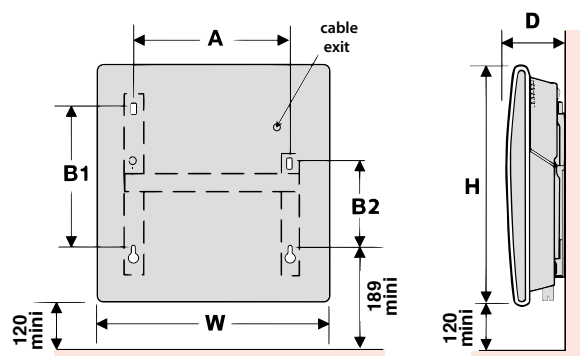

TECHNICAL DATA

| OUTPUT (W) | DIMENSIONS (mm) | | | | | | NET WEIGHT (Kg) |
|------------|-----------------|------------|-----------|-----|-----|-----|-----------------|
| | WIDTH (W) | HEIGHT (H) | DEPTH (D) | A | B1 | B2 | |
| 1000 | 465 | 461 | 114 | 196 | 256 | 158 | 3.7 |
| 1500 | 613 | 461 | 114 | 344 | 256 | 158 | 4.6 |
| 2000 | 761 | 461 | 114 | 492 | 256 | 158 | 5.5 |
| 2400 | 909 | 461 | 114 | 640 | 256 | 158 | 6.2 |

CE - Classe II - IP 24