

Solius




- 1 LCD digital controls
- 2 Perforated frontal air outlet
- 3 Extruded aluminium heating element
- 4 Room temperature sensor
- 5 Anti-tilt system
- 6 Overheating safety device




EASY PROG

- **Manual mode:** Allows to set up the device at the desired temperature from Off to 30°C.
- **Prog mode:** Allows to set up to 3 periods of Comfort temperature by day (24h) over 7 days. Possibility to copy a daily programme on other days of the week.



- 1 Room & set temperature and active mode display (2 modes: Manual/Prog)
- 2 Navigation buttons
- 3 Access to menu/validation

INSTALLATION DIMENSIONS

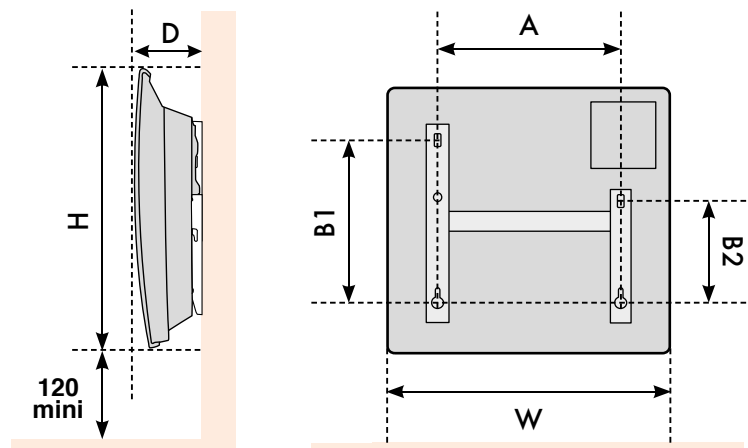

TECHNICAL DATA

OUTPUT (W)	DIMENSIONS (mm)						NET WEIGHT (Kg)
	WIDTH (W)	HEIGHT (H)	DEPTH (D)	A	B1	B2	
1000	601	477	129	343	256	158	5.8
1500	823	477	129	565	256	158	7.8
2000	1045	477	129	787	256	158	9.2

CE - Classe II - IP 24